

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO\$1000.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO\$860.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$710.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)\$690.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)\$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS PTO USE ONLY

860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	12- 20 =		x \$18.00
Independent claims	2- 3 =		x \$80.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>

TOTAL OF ABOVE CALCULATIONS = 860.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

SUBTOTAL = 860.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

TOTAL NATIONAL FEE = 860.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐

TOTAL FEES ENCLOSED = 860.00

Amount to be:	\$
refunded	
charged	\$ 860.00

☐ A check in the amount of _____ to cover the above fees is enclosed.

☒ Please charge my Deposit Account No. 07-0832 in the amount of \$860.00 to cover the above fees.
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. 07-0832 A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Mr. Joseph S. Tripoli
THOMSON multimedia Licensing Inc.
Patent Department
PO Box 5312
Princeton, New Jersey 08540

SIGNATURE

Joel M. Fogelson

NAME

43,613

REGISTRATION NUMBER

March 5, 2001

DATE

91:8 1V 7-8 MAR 01

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO\$1000.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO\$860.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$710.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)\$690.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)\$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)).

☐ 20☐ 30

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	12- 20 =		x \$18.00
Independent claims	2- 3 =		x \$80.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>

TOTAL OF ABOVE CALCULATIONS =

860.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).

☐

SUBTOTAL =

860.00

Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)).

☐ 20☐ 30

+

TOTAL NATIONAL FEE =

860.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

☐

TOTAL FEES ENCLOSED =

860.00

Amount to be:
refunded

\$

charged

\$ 860.00

- ☐ A check in the amount of _____ to cover the above fees is enclosed.
- ☒ Please charge my Deposit Account No. 07-0832 in the amount of \$860.00 to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. 07-0832 A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Mr. Joseph S. Tripoli
THOMSON multimedia Licensing Inc.
Patent Department
PO Box 5312
Princeton, New Jersey 08540

SIGNATURE

Joel M. Fogelson
NAME

43,613

REGISTRATION NUMBER

March 5, 2001

DATE

91:8 HV L-7 MAR 7

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Heinz-Werner Keesen and Ralf Ostermann
Filed : Herewith - PCT National Phase of PCT/EP99/06246
For : METHOD AND APPARATUS FOR TIMESTAMPING
A BITSTREAM TO BE RECORDED OR FOR USING
TIMESTAMPS WHEN REPLAYING FROM A
STREAM RECORDER

PRELIMINARY AMENDMENT

Hon. Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Sir:

In the US national phase application of PCT/EP99/06246 please
enter the following amendments.

IN THE TITLE:

Please amend the title of the application to read -- METHOD AND
APPARATUS FOR TIMESTAMPING A BITSTREAM TO BE RECORDED --.

IN THE SPECIFICATION:

Please amend the specification as follows:

Page 1, line 4, after the title, insert the following:

--This application claims the benefit under 35 U.S.C.

§ 365 of International Application PCT/EP99/06246, filed August 26,
1999, which was published in accordance with PCT Article 21(2) on
March 16, 2000 in English, and which claims the benefit of EPO
Application No. 98250316.1, filed September 7, 1998 and EPO
Application 99250056.1, filed March 2, 1999.--

Page 1, line 5 insert as heading:
--Field of the Invention--

Page 1, line 26 delete "Invention"

Page 1, line 26 insert as heading: --SUMMARY OF THE INVENTION--

Page 5, line 30 delete "Drawings" and
Insert as heading: --BRIEF DESCRIPTION OF THE
DRAWINGS--

Page 6, line 1 delete "Exemplary embodiments" and
insert as heading: --DETAILED DESCRIPTION--

IN THE CLAIMS:

Claims in condition for publication are included on a separate sheet.

Page 11, line 1 delete title, "Claims" and replace with --What is
claimed is:--

Please amend the claims as follows:

1. (Amended) Method for recording or replaying data packets [(A, SI)] of an MPEG bitstream [(A, B, C, D, SI)] using a stream recorder [(STRREC)], wherein MPEG timestamps are included in the MPEG bitstream data packets to be recorded or to be replayed, [characterised by] comprising:
 - when recording, said MPEG bitstream data packets [(A, SI)] are input to said stream recorder through a network [(1394TR, 1394RECS)], which network causes network jitter and which network internally adds network timestamps to data packets of said bitstream in order to reduce by evaluating said network timestamps said network jitter when outputting said data packets from said network;
 - timestamps from said network are recorded in said stream recorder together with said MPEG bitstream data packets [(A, SI)] to be recorded;
 - when replaying said MPEG bitstream data packets [(A, SI)] from said

stream recorder, said recorded network timestamps are used to assign to the replayed MPEG bitstream data packets [(A, SI)] the correct temporal position as it was upon recording;

- the replayed and relocated MPEG bitstream data packets [(A, SI)] pass through said network [(1394TRS, 1394REC)] causing network jitter, which network again internally adds network timestamps to data packets of said bitstream in order to reduce by evaluating these network timestamps said network jitter when outputting said data packets from said network.

2. Method according to claim 1, wherein said network temporally compresses the input data packets.
3. (Amended) Method according to claim 1 [or 2], wherein said network is an IEEE1394 connection.
4. (Amended) Stream recorder [(STRREC)] for recording or replaying data packets [(A, SI)] of an MPEG bitstream [(A, B, C, D, SI)], wherein MPEG timestamps are included in the MPEG bitstream data packets to be recorded or to be replayed, including:
 - a network interface [(1394TR, 1394RECS, 1394TRS, 1394REC)] through which said MPEG bitstream data packets [(A, SI)] are input to said stream recorder for recording, and through which said MPEG bitstream data packets replayed from said stream recorder pass again, which network causes network jitter and which network internally adds network timestamps to data packets of said bitstream in order to reduce by evaluating said network timestamps said network jitter when outputting said data packets from said network;
 - stream recording means [(STRREC)] which record timestamps from said network together with said MPEG bitstream data packets, or which replay said MPEG bitstream data packets, wherein when replaying data of said MPEG bitstream data packets [(A, SI)] said

recorded network timestamps are used to assign to the replayed MPEG bitstream data packets [(A, SI)] the correct temporal position as it was upon recording.

5. Stream recorder according to claim 4, wherein said network temporally compresses the input data packets.
6. (Amended) Stream recorder according to claim 4 [or 5], wherein said network is an IEEE1394 connection.

New claims 7-12 have been added.

7. Method according to claim 1, wherein any scrambling of said input data packets is kept unchanged.
8. Method according to claim 2, wherein any scrambling of said input data packets is kept unchanged.
9. Method according to claim 3, wherein any scrambling of said input data packets is kept unchanged.
10. Stream recorder according to claim 4, wherein any scrambling of said input data packets is kept unchanged.
11. Stream recorder according to claim 5, wherein any scrambling of said input data packets is kept unchanged.
12. Stream recorder according to claim 6, wherein any scrambling of said input data packets is kept unchanged.

REMARKS

The title has been amended to conform with the translated title of the published application (WO 00/14952).


The specification has been amended to include a reference to the priority applications.

The above amendments to the claims have been made to eliminate the multiple dependencies, reference indicia and to meet the requirements of the USPTO.

A replacement Abstract is supplied on a separate sheet.

No fee is believed to have been incurred by virtue of this amendment. However if a fee is incurred on the basis of this amendment, please charge such fee against deposit account 07-0832.

Respectfully submitted,
Heinz-Werner Keesen
Ralf Ostermann


Joel M. Fogelson
Registration No. 43,613
609/734-9534

THOMSON multimedia Licensing Inc.
Patent Operation
PO Box 5312
Princeton, NJ 08543-5312

March 5, 2001

Claims

1. Method for recording or replaying data packets (A, SI) of an MPEG bitstream (A, B, C, D, SI) using a stream recorder (STRREC), wherein MPEG timestamps are included in the MPEG bitstream data packets to be recorded or to be replayed, **characterised** by:
- when recording, said MPEG bitstream data packets (A, SI) are input to said stream recorder through a network (1394TR, 1394RECS), which network causes network jitter and which network internally adds network timestamps to data packets of said bitstream in order to reduce by evaluating said network timestamps said network jitter when outputting said data packets from said network;
 - timestamps from said network are recorded in said stream recorder together with said MPEG bitstream data packets (A, SI) to be recorded;
 - when replaying said MPEG bitstream data packets (A, SI) from said stream recorder, said recorded network timestamps are used to assign to the replayed MPEG bitstream data packets (A, SI) the correct temporal position as it was upon recording;
 - the replayed and relocated MPEG bitstream data packets (A, SI) pass through said network (1394TRS, 1394REC) causing network jitter, which network again internally adds network timestamps to data packets of said bitstream in order to reduce by evaluating these network timestamps said network jitter when outputting said data packets from said network.
2. Method according to claim 1, wherein said network temporally compresses the input data packets.
3. Method according to claim 1 or 2, wherein said network is

an IEEE1394 connection.

4. Stream recorder (STRREC) for recording or replaying data packets (A, SI) of an MPEG bitstream (A, B, C, D, SI),
5 wherein MPEG timestamps are included in the MPEG bitstream data packets to be recorded or to be replayed, including:
- a network interface (1394TR, 1394RECS, 1394TRS, 1394REC)
10 through which said MPEG bitstream data packets (A, SI) are input to said stream recorder for recording, and through which said MPEG bitstream data packets replayed from said stream recorder pass again, which network causes network jitter and which network internally adds network timestamps to data packets of said bitstream in
15 order to reduce by evaluating said network timestamps said network jitter when outputting said data packets from said network;
 - stream recording means (STRREC) which record timestamps from said network together with said MPEG bitstream data
20 packets, or which replay said MPEG bitstream data packets, wherein when replaying data of said MPEG bitstream data packets (A, SI) said recorded network timestamps are used to assign to the replayed MPEG bitstream data packets (A, SI) the correct temporal position as it was upon
25 recording.
5. Stream recorder according to claim 4, wherein said network temporally compresses the input data packets.
- 30 6. Stream recorder according to claim 4 or 5, wherein said network is an IEEE1394 connection.

METHOD AND APPARATUS FOR TIMESTAMPING A BITSTREAM TO BE RECORDED

5 The invention relates to a method and to an apparatus for timestamping a bitstream to be recorded or for using time-stamps when replaying from a stream recorder, e.g. an optical disc recorder.

10

Background

Stream recording assumes an 'application device', e.g. a settop box, connected to a DVD Streamer. Both devices are
15 connected via e.g. an IEEE1394 (IEC 611883) interface which in its transmitting and receiving firmware contains means to timestamp data and to strip off these timestamps again, using them for timing regeneration. The resulting effect is that this system behaves between the IEEE1394 interface input and the IEEE1394 interface output like a constant delay
20 system.

EP-A-0 701 374 describes the recording of superpackets each including a timestamp.

25

Invention

A stream recorder must re-generate the timing of data packets as it was upon recording, when these packets are played
30 back, so that between recording and playback this system also behaves like a constant delay system. In one embodiment of the invention the stream recorder adds its own timestamps to the data packets when recording and evaluates them when replaying in order to assign to the data packets the correct
35 temporal position. Thereby the original data packet burst characteristic is reconstructed for a data stream having in principle non-equidistant data packets.

However, there is an in-series connection between two time-stamping and time regeneration mechanisms which can introduce jitter accumulation. In a second embodiment of the invention the application device itself, before sending the
5 data through the IEEE1394 interface, adds time stamps to the data packets. These timestamps may have the meaning of 'departure time' rather than 'arrival time' and pass the IEEE1394 interface 'unnoticed', i.e. from a IEEE1394 interface point of view they are part of the payload. At the
10 other end of the chain these timestamps are used when the stream recorder plays back a stream. The advantage is that there is only one timing/regeneration process involved which has influence on the temporal position of the replayed data packets, and that therefore no jitter is accumulated. In
15 this second embodiment the stream recorder does not make use of the IEEE1394 timestamps.

In a third embodiment the stream recorder records the IEEE1394 timestamps and evaluates them when replaying in order to assign to the data packets the correct temporal position.
20

It is one object of the invention to disclose a method for recording and replaying a bitstream, wherein after replaying
25 the recorded data packets do have the correct temporal location within the bitstream and wherein no jitter accumulation takes place. This object is achieved by the methods disclosed in claims 1, 3 and 4.

30 It is a further object of the invention to disclose an apparatus which utilises the inventive method. This object is achieved by the apparatuses disclosed in claims 6, 7, 9 and 10.

35 In principle, the inventive method is suited for: timestamping a bitstream to be recorded or for using timestamps when replaying from a stream recorder, wherein a device or signal source outputting said bitstream to be re-

corded adds said timestamps to data packets of said bitstream and wherein the data packets of said bitstream pass to said stream recorder through a network which causes network jitter and for which network said timestamps belong to the payload of said data packets, and wherein said timestamps are used when replaying said data packets from said stream recorder in order to relocate the replayed data packets to the corresponding original temporal position in said bitstream,

10

or is suited for:

timestamping an MPEG bitstream to be recorded or for using timestamps when replaying from a stream recorder, wherein MPEG timestamps are included in data packets of said MPEG bitstream to be recorded and for the recording additional timestamps generated by said stream recorder become attached to the data packets of said MPEG bitstream to be recorded, and wherein said additional timestamps are used when replaying said data packets from said stream recorder in order to relocate the replayed data packets to the corresponding original temporal position in said MPEG bitstream,

20

or is suited for:

timestamping a bitstream to be recorded or for using timestamps when replaying from a stream recorder, wherein data packets of said bitstream pass to said stream recorder through a network which causes network jitter and which network internally adds network timestamps to data packets of said bitstream in order to reduce said jitter when outputting said data packets, and wherein said stream recorder records said network timestamps and during replay uses said recorded network timestamps in order to relocate the replayed data packets to the corresponding original temporal position in said bitstream.

30

Advantageous additional embodiments of the inventive method are disclosed in the respective dependent claims.

35

In principle, the inventive apparatus is suited for time-

stamping a bitstream to be recorded and includes:

- program selection means which provide data packets from said bitstream, the data packets belonging to a specific program;
- 5 - a network interface which provides data of said data packets to a stream recorder or which receives data of said data packets from said stream recorder, wherein the related network causes network jitter and for which network said timestamps belong to the payload of said data packets and
- 10 wherein said timestamps are used to relocate the replayed data packets to the corresponding original temporal position in said bitstream;
- means for generating timestamps and for adding these timestamps to the data of said data packets, which means provide
- 15 the output data to said network interface;
- means for decoding replayed data of said data packets received from said network interface,

and concerns a Stream recorder for a bitstream, including:

- 20 - a network interface which provides data of data packets of said bitstream including timestamps, having been inserted outside said network interface, for recording or which receives replayed recorded data, wherein the related network causes network jitter and for which network said timestamps
- 25 belong to the payload of said data packets;
- stream recording means which record data of said data packets including said timestamps or which replay data of said data packets, wherein during replay said timestamps are used in order to relocate the replayed data packets to the
- 30 corresponding original temporal position in said bitstream before the replayed data packets enter said network interface,

or concerns a Stream recorder for a bitstream, including:

- 35 - a network interface which provides data of data packets of said bitstream, said data packets including MPEG timestamps, for recording or which receives replayed recorded data for data packets including said MPEG timestamps;

- stream recording means which record data of said data packets, including said MPEG timestamps, and additional timestamps generated by said stream recording means which become attached to the data packets of said MPEG bitstream to be recorded, or which replay data of said data packets, wherein during said replay said additional timestamps are used in order to relocate the replayed data packets to the corresponding original temporal position in said MPEG bitstream,

10

or concerns a Stream recorder for a bitstream, including:

- a network interface which provides data of data packets of said bitstream for recording or which receives replayed recorded data, wherein the related network causes network jitter and which network internally adds network timestamps to data packets of said bitstream in order to reduce said jitter when outputting said data packets;

- stream recording means which record data of said data packets including said network timestamps, or which replay data of said data packets, wherein during replay said network recorded timestamps are used in order to relocate the replayed data packets to the corresponding original temporal position in said bitstream before the replayed data packets enter said network interface.

25

Advantageous additional embodiments of the inventive apparatuses are disclosed in the respective dependent claims.

30 Drawings

Embodiments of the invention are described with reference to the accompanying drawings, which show in:

- Fig. 1 simplified block diagram of a settop box and a Stream recorder with IEEE1394 connection;
- Fig. 2 steps in the transmission of a transport stream;
- Fig. 3 structure of a stream pack;
- Fig. 4 structure of an application time stamp.

35

Exemplary embodiments

The following abbreviations are used in the description:

DVD: digital versatile disc, LB: logical block, RBN: relative byte number, RBP: relative byte position, RLBN: relative logical block number, STB: set top box, TOC: table of content, SCR: system clock reference, SOB: stream object, DVD RTRW: DVD realtime rewritable, PES: packetised elementary stream, PTS: presentation timestamp, DTS: decoding timestamp, ATS: application timestamp.

In Fig. 1 transport streams are received by an antenna ANT and pass through a tuner TU selecting one of the transport streams, and through a demultiplexer DEM. Into the output signal of DEM time stamps can be inserted in a time stamp inserter TSI which receives the time stamps from a time stamp generator TS.

An application device which can be a DVD stream recorder including stream recording means STRREC, receives output data from DEM or TSI, respectively, via an IEEE1394 interface transmitter 1394TR and an IEEE1394 interface receiver 1394RECS. The data replayed from STRREC pass through an IEEE1394 interface transmitter 1394TRS and an IEEE1394 interface receiver 1394REC to decoder means DEC which deliver the final output signal or signals O. DEC may include a video decoder, one or more audio decoders and one or more additional data decoders.

Instead of an IEEE1394 connection any other network causing network jitter like the Ethernet or the Internet can be used.

TU, DEM, TS, TSI, 1394TR, 1394REC and DEC can be parts of a settop box. 1394RECS, STRREC and 1394TRS can be parts of a DVD stream recorder. Instead of a settop box any other data stream source can be used, e.g. a DVD player or a PC or Internet receiver. In that case ANT and TU is replaced by e.g. an optical disc and a pickup.

Fig. 2 depicts the temporal behaviour of certain items of the received PES stream with respect to the functional blocks in Fig. 1.

Fig. 2a shows a transport stream with multiplex of packets of programs A, B, C and D, and SI information at the output of TU in Fig. 1.

Fig. 2b depicts source packets of the selected program A with its relevant SI information at the output of DEM in Fig. 1. The black parts of the packets are the packet headers which include transmitted time stamps represented by the arrows.

Fig. 2c shows source packets at the output of the smoothing buffer inside IEEE1394 transmitter 1394TR which causes such a delay that the packets are now essentially equidistant.

Fig. 2d shows the source packets at the input of the IEEE1394 receiver 1394REC which introduces an additional delay, wherein it is assumed that no stream recorder is connected or that the stream recorder has no influence on the temporal location of the packets.

Fig. 2e depicts the reconstructed timing for the source packets at the output of 1394REC which again introduces an additional delay. One can see that time differences Δt_1 and Δt_2 of Fig. 2e finally correspond to that of Fig. 2b. The arrival time is the departure time plus the overall delay ODEL which is represented by a timestamp offset.

The clock frequency for transferring the bytes of a transport stream may be different in different applications.

An IEEE1394 system uses segments having a length of 125 μ s, called cycle master packet. Within such cycle a data packet has a non-defined temporal position, i.e. a jitter range of maximum nearly 125 μ s is introduced. Therefore the IEEE1394 system makes use of its own 'timestamps' which serve to temporally correctly relocate the packets within the 125 μ s segments at the output of an IEEE1394 receiver.

The exact timing is important for a succeeding decoder because the decoder's buffer capacity is limited and an additional jitter in the data packets could cause buffer over-

flow or underflow and thereby erroneously decoded data.
An IEEE1394 transmitter includes a buffer at its input and
an IEEE1394 receiver includes a buffer at its output, which
smooth the average data rate. Additionally, in the IEEE1394
5 system a temporal compression of the data packets takes
place which is apparent from the comparison of Fig. 2c and
2d. This compression also increases the maximum jitter at
the demultiplexer output. In addition to the limited tempo-
ral resolution in the IEEE1394 system described above a fur-
10 ther portion of jitter is added by the non-perfect 25MHz
clock.

A proposed stream recorder specification offers the possi-
bility to record stream-recorder generated timestamps which
15 are derived from e.g. a 27MHz clock. In one embodiment of
the invention the stream recorder records the IEEE1394 time-
stamps instead and evaluates them when replaying in order to
assign to the data packets the correct temporal position.

20 The length of the data packets is programmable in the
IEEE1394 system. Therefore in another embodiment of the in-
vention the original 188 byte length of the transport stream
packets is increased by e.g. 4 bytes to a total length of
192 bytes in order to add timestamps supplied from the ap-
25 plication device, e.g. a settop box.

The DVD Stream Recording system is designed to use rewri-
table DVD discs for recording existing digital bitstreams,
editing them and playing them back as bitstreams. This sys-
30 tem is designed to satisfy the following requirements:

- Any packet size is supported as long as it is equal or
less than 2kByte and is of constant length within a take.
- A timing mechanism, i.e. a time stamp is added to every
broadcast packet to enable proper packet delivery during
35 playback.
- To enlarge the fields of applications, non-real-time re-
cording should be possible. However, in this case the STB
has to generate the timestamp information.

- Data allocation strategy and a file system to support real-time stream recording.
- Many digital services require Service Information which normally is embedded in the real-time stream. To support a
5 STB fed by data from a DVD player, the DVD should provide additional space, which can be used by the STB to duplicate part of the service information and to add additional TOC information.
- Copy Protection must be supported. In addition, any scrambling
10 performed by the service provider or the STB must be kept unchanged.

User requirements can be grouped into requirements for recording, requirements for playback, and requirements for editing:
15

Real-time Recording

The system is designed to enable real-time recording of digital streams. It allows the user to concatenate recordings, even if those recordings consist of different stream
20 formats. If recordings are concatenated, a seamless or close-to-seamless playback feature can be achieved, but is not required.

Navigation Support

25 To support navigation two pieces of information (lists) are generated during recording:

- 1) An 'original' version of a play list. This list contains quite low level information, e.g. time map or (broadcast) packet order of the recording. This list is accessible by
30 the STB and the content is understood by the DVD streamer as well as by the STB. In its original version the playlist enables the playback of a complete recording. The playlist may be accessed and extended after recording by the STB to allow more sophisticated playback sequences.
- 35 2) The second piece of information, a mapping list, is generated to support the stream recorder to retrieve packet stream chunks (cells), that are described in terms of the application domain, e.g. 'broadcast packets' or 'time'. This

list is owned and understood by the DVD streamer only.

Content Description

The system can reserve space which can be used by the STB to
5 store high-level TOC and Service Information. This information is provided for the user to navigate through the content stored on disc and may contain sophisticated EPG information. The content needs not to be understood by the stream recorder. However a common subset of the TOC information,
10 e.g. based on a character string, may be useful to be shared between STB and DVD, in order to enable the stream recorder to provide a basic menu by itself.

Playback of individual recording and playing all recordings
15 sequentially is possible via a play list.

Player menus for entry point selection

The STB can generate a sophisticated menu based on the TOC information stored on the disc. A simple menu is generated by the streamer itself, e.g. via some 'character' information
20 which is shared by STB and DVD.

Trick play modes

The STB can steer trick play via the 'play list'. Due to the nature of the broadcast stream, the trick play features may
25 be limited to basic ones, e.g. Time Search and Title Jump. User defined playback sequence features like programming or parental control can be supported via the play list.

The DVD streamer creates the 'original version' of the play
30 list. It can allow extensions and modifications of the play list by the STB for more sophisticated playback features. The DVD streamer is not responsible for the content of those sophisticated playlist(s).

The system supports the deletion of single recordings on
35 user's request. Preferably the system allows this feature under the control of the STB.

The system may support insert editing.

Concerning the directory and file structure, the organisation of Stream Data and Navigation Data of DVD Stream Recording is done in a specific way such as to take into account the following:

- 5 - Any DVD Streamer device has certain requirements to store its own housekeeping data or Streamer-specific navigation data on the disc. These data are solely for helping the retrieval of recorded data; they need not be understood or even be visible to any outside application
- 10 device AD.
- Any DVD Streamer device needs to communicate with the application device AD it is connected to. This communication is as universal as possible so that the maximum possible range of applications can be connected to the
- 15 Streamer. The Navigation Data to support such communication are called Common navigation data and must be understandable by the Streamer as well as by the application device.
- The Streamer device offers to the connected application
- 20 device AD a means for storing its own private data of any desired kind. The Streamer needs not to understand any of the content, internal structure, or meaning of this application-specific navigation data.
- 25 A possible directory and file structure is described below. The files storing the disc content are placed under the STRREC directory which is under the root directory. Under the STRREC directory the following files are created:
- COMMON.IFO
- 30 Basic information to describe the stream content. Needs to be understood by the Application Device as well as the Streamer.
- STREAMER.IFO
- Private housekeeping information specific to the
- 35 Streamer Device. Needs not to be understood by the Application Device.
- APPLICAT.IFO
- Application Private Data, i.e. information that is spe-

cific to the Application(s) connected to the Streamer.

Needs not to be understood by the Streamer.

- REALTIME.SOB

Recorded real-time stream data proper.

- 5 Note that except for the files described above, the STRREC directory shall not contain any other files or directories.

Stream Data include one or more 'Stream Objects' (SOBs) which each can be stored as a 'Program stream' as described
10 in ISO/IEC 13818-1, Systems.

A SOB can be terminated by a program_end_code. The value of the SCR field in the first pack of each SOB may be non-zero.

A SOB contains the Stream Data packed into a sequence of 'Stream Packs' (S_PCKs). Stream data can be organised as one
15 elementary stream and are carried in PES packets with a stream_id.

In Stream recording, the application performs its own padding so that the pack length adjustment methods of DVD-ROM Video or RTRW need not to be used. In Stream recording it is
20 safe to assume, that the Stream packets will always have the necessary length.

As shown in Fig. 3, a Stream Pack has 2048 bytes and includes a pack header followed by a Stream PES Packet. A system
25 header may be included in those S_PCKs which are the first S_PCK of a SOB. When a system header is included the length of the remaining Stream PES Packet content may be 2010 bytes, and when not included, 2034 bytes. A pack is recorded in one LB. The pack header may include the following
30 items of data:

Field	Number of bits	Number of bytes	Value	Comment
Pack_start_code	32	4	0000 01BAh	
'01'	2	6	provider defined	01b
SCR_base[32..30]	3			(Note 1)
marker_bit	1			1
SCR_base[29..15]	15			
marker_bit	1			1
SCR_base[14..0]	15			
marker_bit	1			1
SCR_extension	9			

marker_bit	1			1
program_mux_rate	22	3	01 3883h	mux_rate = 8Mbps (Note 2)
marker_bit	1			1
marker_bit	1			1
reserved	5			11111b
pack_stuffing_length	3	1	F8h	no stuffing length = 000b

Note 1: 'SCR_base[32]' is set to ZERO.

Note 2: 'program_mux_rate' is set to 8Mbps.

In a Stream PES Packet, the stream PES packet header content is identical to that defined in the DVD standard, with the following limitations and additional rules:

- The 'stream_id' field is set to 0xBD (private_stream_1)
- The total length of the stream PES packet header is 14 bytes. Therefore the 'PES_header_data_length' field is set to 5 bytes.
- Each stream PES packet header carries a PTS timestamp. DTS timestamps are not encoded. Therefore the 'PTS_DTS_flags' is set to '10b'.
- The 'PES_packet_length' includes any reserved bytes behind the last Application transport packet up to the end of the streamer DVD pack. Therefore the 'PES_packet_length' is always 2028 bytes.
- No padding PES packet shall be encoded in a streamer DVD pack. Padding is described below in the 'application header'.

The Stream PES packet header may include the following items of data:

Field	Number of bits	Number of bytes	Value	Comment
Packet_start_code_prefix	24	3	00 0001h	
Stream_id	8	1	1011 1101b	private_stream_1
PES_packet_length	16	2	07 ECh	2028
'10'	2	3	10b	
PES_scrambling_control	2			
PES_priority	1		0	no priority
data_alignment_indicator	1		0	not defined by descriptor
copyright	1		0	not defined by descriptor
original_or_copy	1		0	copy
PTS_DTS_flags	2		10b	
ESCR_flag	1		0	no ESCR field
ES_rate_flag	1		0	no ES rate field

DSM trick mode flag	1		0	no trick mode field
additional copy info flag	1		0	no copy info field
PES_CRC flag	1		0	no CRC field
PES_extension flag	1		0	no extension
PES_header_data_length	8		05h	5
'0001'	4			
DTS[32..30]	3			
marker_bit	1			
DTS[29..15]	15	5	Provider defined	
marker_bit	1			
DTS[14..0]	15			
marker_bit	1			
stuffing byte	0	0		

Private data area

sub_stream_id	8	1		
---------------	---	---	--	--

Stream Data Area

- 5 Fig. 3 also shows that the Stream Data Area inside a Stream PES Packet includes an application header, an application header extension and a sequence of application packets, each prefixed by an application packet timestamp. The Application Header may include the following items of data:

Field	Number of bits	Number of bytes	Value	Comment
(1) VERSION	8	1	01h	
(2) APPLICATION_ID	16	2		
(3) MAX_BITRATE	32	4		
(4) SMOOTH_BUF_SIZ	16	2	'3540 bytes'	
(5) TS_REF_CL_FREQ	32	4	'27 MHz'	
(6) AP_PKT_LEN	16	2		
(7) TS_LEN	8	1	04h	4
(8) AP_PKT_Ns	8	1		
(9) START_OF_STR	1	1	0b or 1b	
(10) END_OF_STR	1		0b or 1b	
reserved	6		111111b	
reserved	56	7	7x(FFh)	
	Total	25		

- 10 (1) VERSION describes the version number of the application header format.
- (2) APPLICATION_ID describes the application that generated the stream. If the application is unknown, 0x0000 is encoded.
- 15 (3) MAX_BITRATE describes the output bitrate parameter of the leaky bucket flow control model in Mbps.

(4) SMOOTH_BUF_SIZ describes the buffer size parameter of the leaky bucket flow control model.

(5) TS_REF_CL_FREQ describes the reference clock frequency of the packet arrival/delivery timestamp.

5 (6) AP_PKT_LEN describes the length of the application packet, excluding the timestamp, in bytes.

(7) TS_LEN describes the length of the timestamp field in bytes and is set to the value '4'.

(8) AP_PKT_Ns is the number of application packets in this
10 Stream PES Packet DVD pack:

$$AP_PKT_Ns = 1, 2, \dots, 487 \text{ div } AP_PKT_LEN$$

(9) START_OF_STR: when set to '1', this Stream PES Packet is the first DVD pack in the stream.

(10) END_OF_STR: when set to '1', this Stream PES Packet is
15 the last DVD pack in the stream.

The application header extension includes a list of entries, where there is exactly one entry of 1 byte for each Applicationtransport layer Packet. These bytes are used to store
20 information that may differ from application packet to application packet. The total length of the application header extension is 46 bytes. The first 'AP_PKT_Ns' entries of these carry valid data. Unused list entries may carry undefined values. The total length of 'application header' and
25 'application header extension' is 71 bytes.

Field	Number of bits	Number of bytes	Value	Comment
(1) AU_START	1	1		
(2) AU_END	1			
(3) reserved	4			
(4) COPYRIGHT	2			

(1) AU_START: when set to '1', indicates that the associated application packet contains a random access entry point into the stream

(2) AU_END: when set to '1', indicates that the associated
30 application packet is the last packet of a random access point.

(4) COPYRIGHT describes the copyright status of the associated application packet.

The application timestamps ATS of each application packet are represented by a 32 bit value. An ATS is divided into a base part and an extension part. The base part represents the 90kHz unit value, and the extension part represents the less significant value measured in 27MHz units:

$$0 \leq \text{ATS_exten} < 300 .$$

$$\text{ATS in seconds} = \text{ATS_base}/90\text{kHz} + \text{ATS_exten}/27\text{MHz} .$$

Together, ATS_base and ATS_exten cover a range of more than 93 seconds.

The application timestamp describing format is depicted in Fig. 4.

The numbers and parameters given in this description are examples and can be adapted correspondingly to other applications of the invention.

What is claimed is:

1. Method for recording or replaying data packets of an MPEG bitstream using a stream recorder, wherein MPEG timestamps are included in the MPEG
5 bitstream data packets to be recorded or to be replayed, comprising:
 - when recording, said MPEG bitstream data packets are input to said stream recorder through a network, which network causes network jitter and which network internally adds network timestamps to data packets of said
10 bitstream in order to reduce by evaluating said network timestamps said network jitter when outputting said data packets from said network;
 - timestamps from said network are recorded in said stream recorder together with said MPEG bitstream data packets to be recorded;
 - when replaying said MPEG bitstream data packets from said stream recorder, said recorded network timestamps are used to assign to the replayed MPEG
15 bitstream data packets the correct temporal position as it was upon recording;
 - the replayed and relocated MPEG bitstream data packets pass through said network causing network jitter, which network again internally adds network timestamps to data packets of said bitstream in order to reduce by evaluating
20 these network timestamps said network jitter when outputting said data packets from said network.
2. Method according to claim 1, wherein said network temporally compresses the input data packets.
- 25 3. Method according to claim 1, wherein said network is an IEEE1394 connection.

4. Stream recorder for recording or replaying data packets of an MPEG bitstream, wherein MPEG timestamps are included in the MPEG bitstream data packets to be recorded or to be replayed, including:
- a network interface through which said MPEG bitstream data packets are input to said stream recorder for recording, and through which said MPEG bitstream data packets replayed from said stream recorder pass again, which network causes network jitter and which network internally adds network timestamps to data packets of said bitstream in order to reduce by evaluating said network timestamps said network jitter when outputting said data packets from said network;
 - stream recording means which record timestamps from said network together with said MPEG bitstream data packets, or which replay said MPEG bitstream data packets, wherein when replaying data of said MPEG bitstream data packets said recorded network timestamps are used to assign to the replayed MPEG bitstream data packets the correct temporal position as it was upon recording.
5. Stream recorder according to claim 4, wherein said network temporally compresses the input data packets.
6. Stream recorder according to claim 4, wherein said network is an IEEE1394 connection.
7. Method according to claim 1, wherein any scrambling of said input data packets is kept unchanged.
8. Method according to claim 2, wherein any scrambling of said input data packets is kept unchanged.
9. Method according to claim 3, wherein any scrambling of said input data packets is kept unchanged.

10. Stream recorder according to claim 4, wherein any scrambling of said input data packets is kept unchanged.
11. Stream recorder according to claim 5, wherein any scrambling of said input data packets is kept unchanged.
12. Stream recorder according to claim 6, wherein any scrambling of said input data packets is kept unchanged.

20
Abstract

A settop box can be connected to a DVD Streamer via an IEEE1394 interface which contains means to timestamp data and to strip off these timestamps again, using them for timing regeneration. The DVD Streamer also must re-
5 generate the timing of data packets as it was upon recording, when these packets are played back. The streamer could also use own timestamps and strip them off again when replaying. So, in total, there is an in-series connection between two time stamping and time regeneration mechanisms which introduces
10 jitter accumulation.

According to the invention the settop box itself adds time stamps to the data packets before sending them through the IEEE1394 interface. These timestamps pass the IEEE1394 interface unnoticed, i.e. as part of the payload. These time-
15 stamps are used when the DVD streamer plays back a stream. The advantage is that there is only one timing/regeneration process involved and that no jitter is accumulated.

As an alternative, the stream recorder uses the IEEE1394 timestamps and evaluates them when replaying in order to assign to the data packets the correct temporal position.
20

1/2

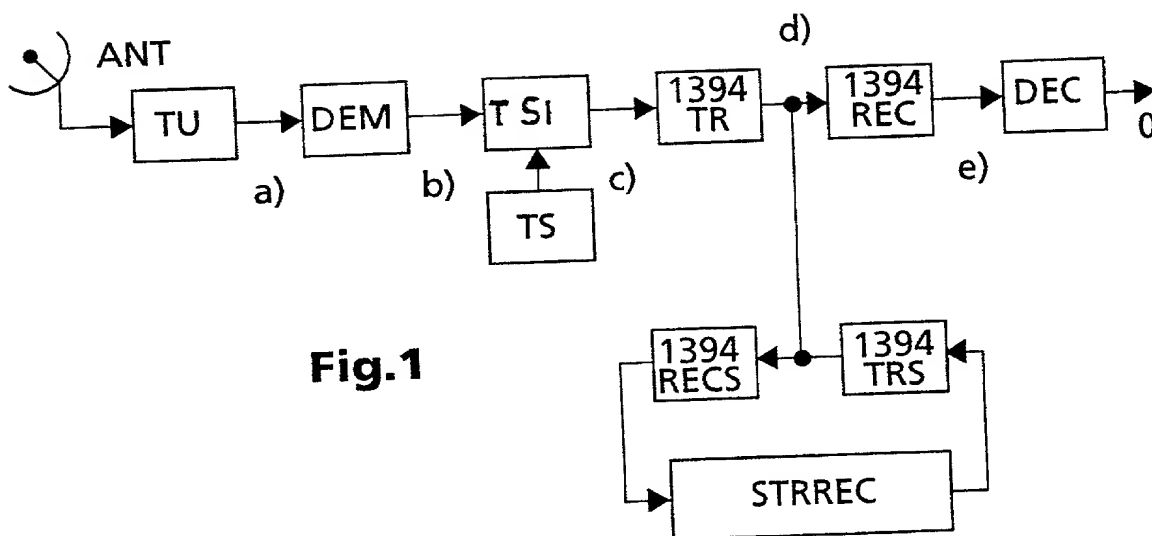


Fig.1

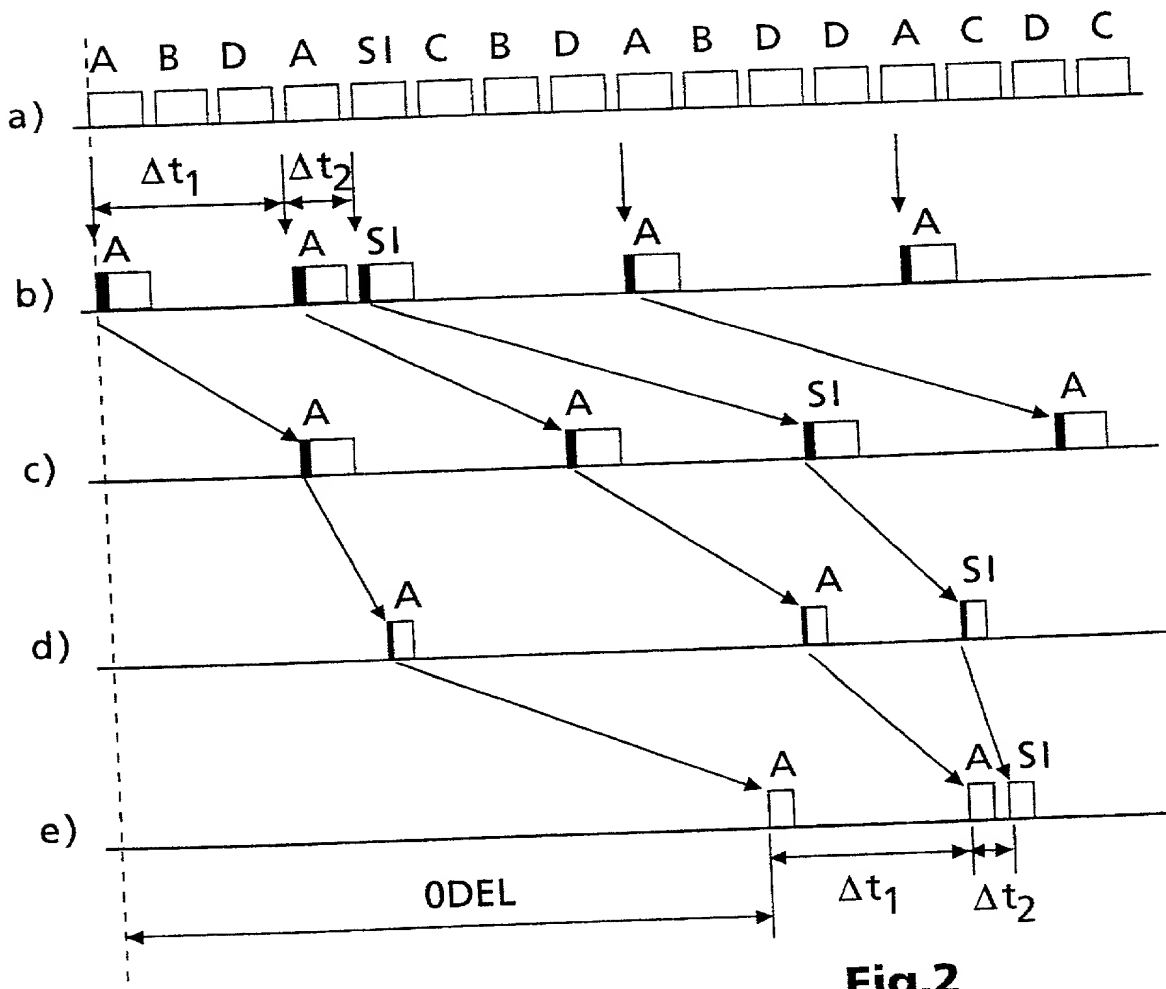


Fig.2

2/2

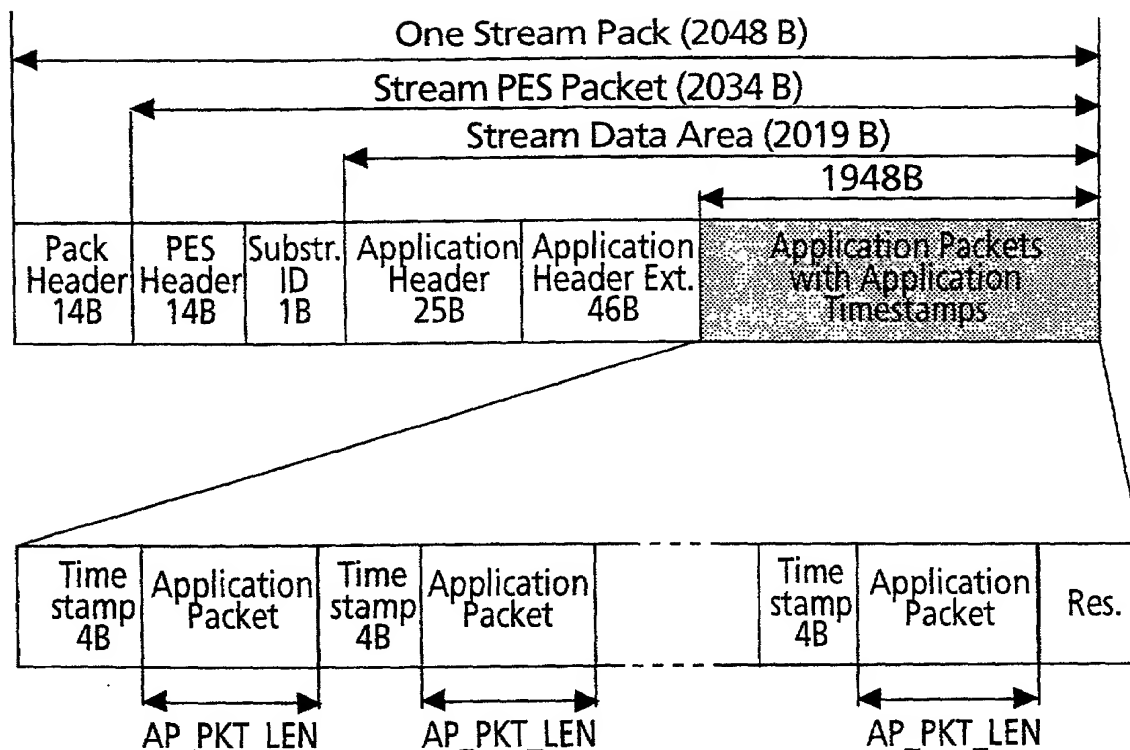


Fig.3

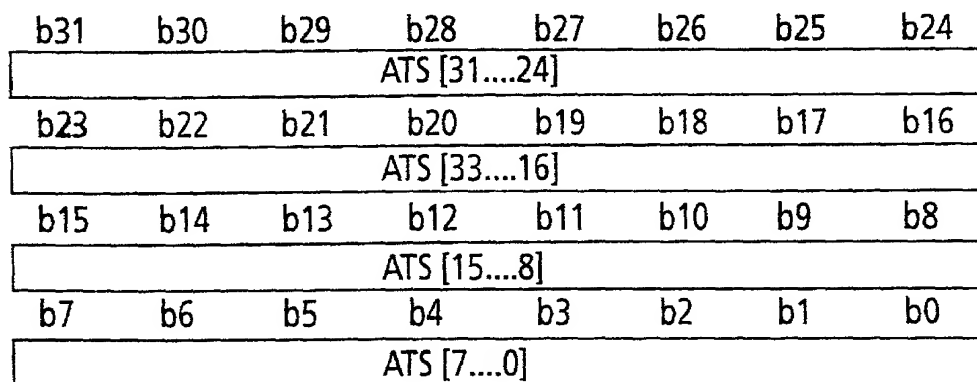


Fig.4

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Heinz-Werner Keesen and Ralf Ostermann
Filed : Herewith
For : METHOD AND APPARATUS FOR TIMESTAMPING
A BITSTREAM TO BE RECORDED OR FOR USING
TIMESTAMPS WHEN REPLAYING FROM A
STREAM RECORDER

APPOINTMENT OF ASSOCIATE ATTORNEY

Hon. Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

I, Eric P. Herrmann, an attorney of record, hereby appoint Joel M. Fogelson, Reg. No. 43,613, as an associate attorney in the above-identified application, with full power to prosecute the above-identified application, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

PLEASE ADDRESS ALL FUTURE COMMUNICATIONS TO:

Joseph S. Tripoli
Patent Operations
Thomson Multimedia Licensing Inc.
P. O. Box 5312
Princeton, NJ 08543-5312

Respectfully submitted,
Heinz-Werner Keesen et al.

By



Eric P. Herrmann, Attorney
Reg. No. 29,169
Tel. No. (609) 734-9754

Patent Operation
Thomson Multimedia Licensing Inc.
P. O. Box 5312
Princeton, New Jersey 08543-5312

March 5, 2001

DECLARATION FOR UNITED STATES PATENT APPLICATION,
POWER OF ATTORNEY, DESIGNATION OF CORRESPONDENCE ADDRESS

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR TIMESTAMPING A BITSTREAM TO BE RECORDED

the specification of which

(CHECK ONE) () is attached hereto.

(xx) was filed on August 26, 1999, Application Serial. No. PCT/EP 99/06246 and was amended on .

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56(a).

I hereby claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent, utility model, design or inventor's certificate having a filing date before that of the application(s) on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
Number	Country	Date Filed	Yes	No
98250316.1	EP	September 07, 1998	xx	
99250056.1	EP	March 02, 1999	xx	

I hereby claim the benefit under 35 USC 120 of any US Application(s) listed below, and, insofar as the subject matter of each of the claims of this Application is not disclosed in the prior US application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56(a).

Serial No.: _____ Filed: _____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under of 18 USC 1001 and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph S. Tripoli (Reg. No. 26,040) Telephone: (609) 734-9443.

Address all correspondence to Joseph S. Tripoli, Patent Operations - Thomson multimedia Licensing, Inc. - CN 5312 - Princeton, New Jersey 08543-0028.

Signature: Heinz-Werner Keesen Date: 04 day of Dec, 2000

Sole or First Joint Inventor: Heinz-Werner Keesen

Citizenship: DE

Residence and Post Office Address:

Siemensstr. 22
D-30173 Hannover DEX
Germany

Signature: Ralf Ostermann Date: 14 day of Dec, 2000

Second Joint Inventor: Ralf Ostermann

Citizenship: DE

Residence and Post Office Address:

Oberstr. 17
D-30167 Hannover DEX
Germany